

Safety instructions

Read the safety instructions carefully and follow all instructions before assembling or operating the device.




Failure to follow these instructions could result in personal injury or property damage. Do not exceed the maximum load capacity of 180 kg. Do not stand on the device. This device is intended for use on a hard, level surface capable of supporting the load. Use on anything other than hard, level surfaces can result in instability, which in turn can cause damage and injury. No modifications may be made to this product. If the creeper is not functioning properly or any parts are loose, missing or broken, stop using the device immediately. The upholstery cover can burn, be careful near open fire or lit cigarettes.

Installation instructions

Connect the three frame parts of the upholstered assembly table with the 4 hexagonal screws (M8x55) and lock nuts (M8). Tighten the M8 hex head bolts and nuts securely.

Mount the 6 castors onto the frame of the assembled creeper

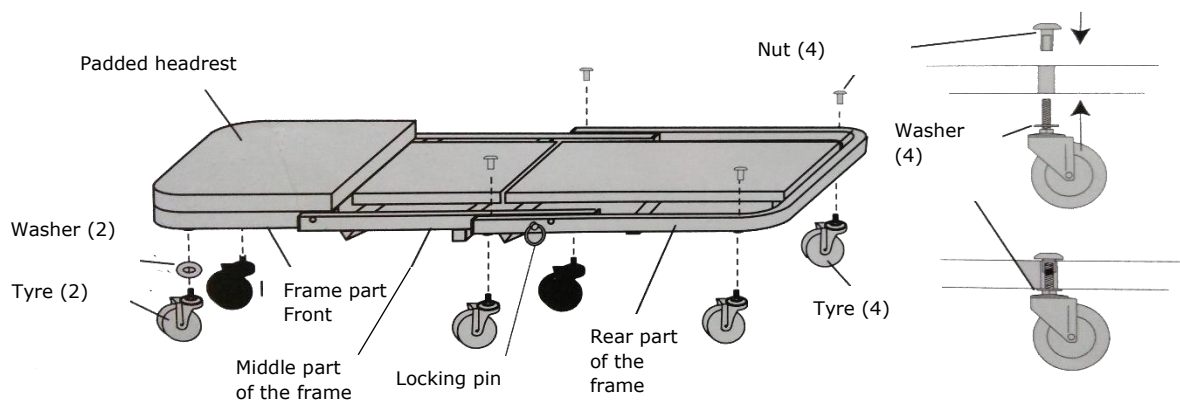

How to convert the creeper into a workshop seat:

1. Locate and unlock the locking pin by pulling it out until the locking mechanism (locking hole) is disengaged. Tilt the middle part of the creeper towards the back until the locking pin can engage with the locking latch of the workshop seat.
2. Fold the front part of the creeper (head frame) to the other side until it sits horizontally.
3. Perform the above steps in reverse order to convert the workshop seat to a creeper.

