


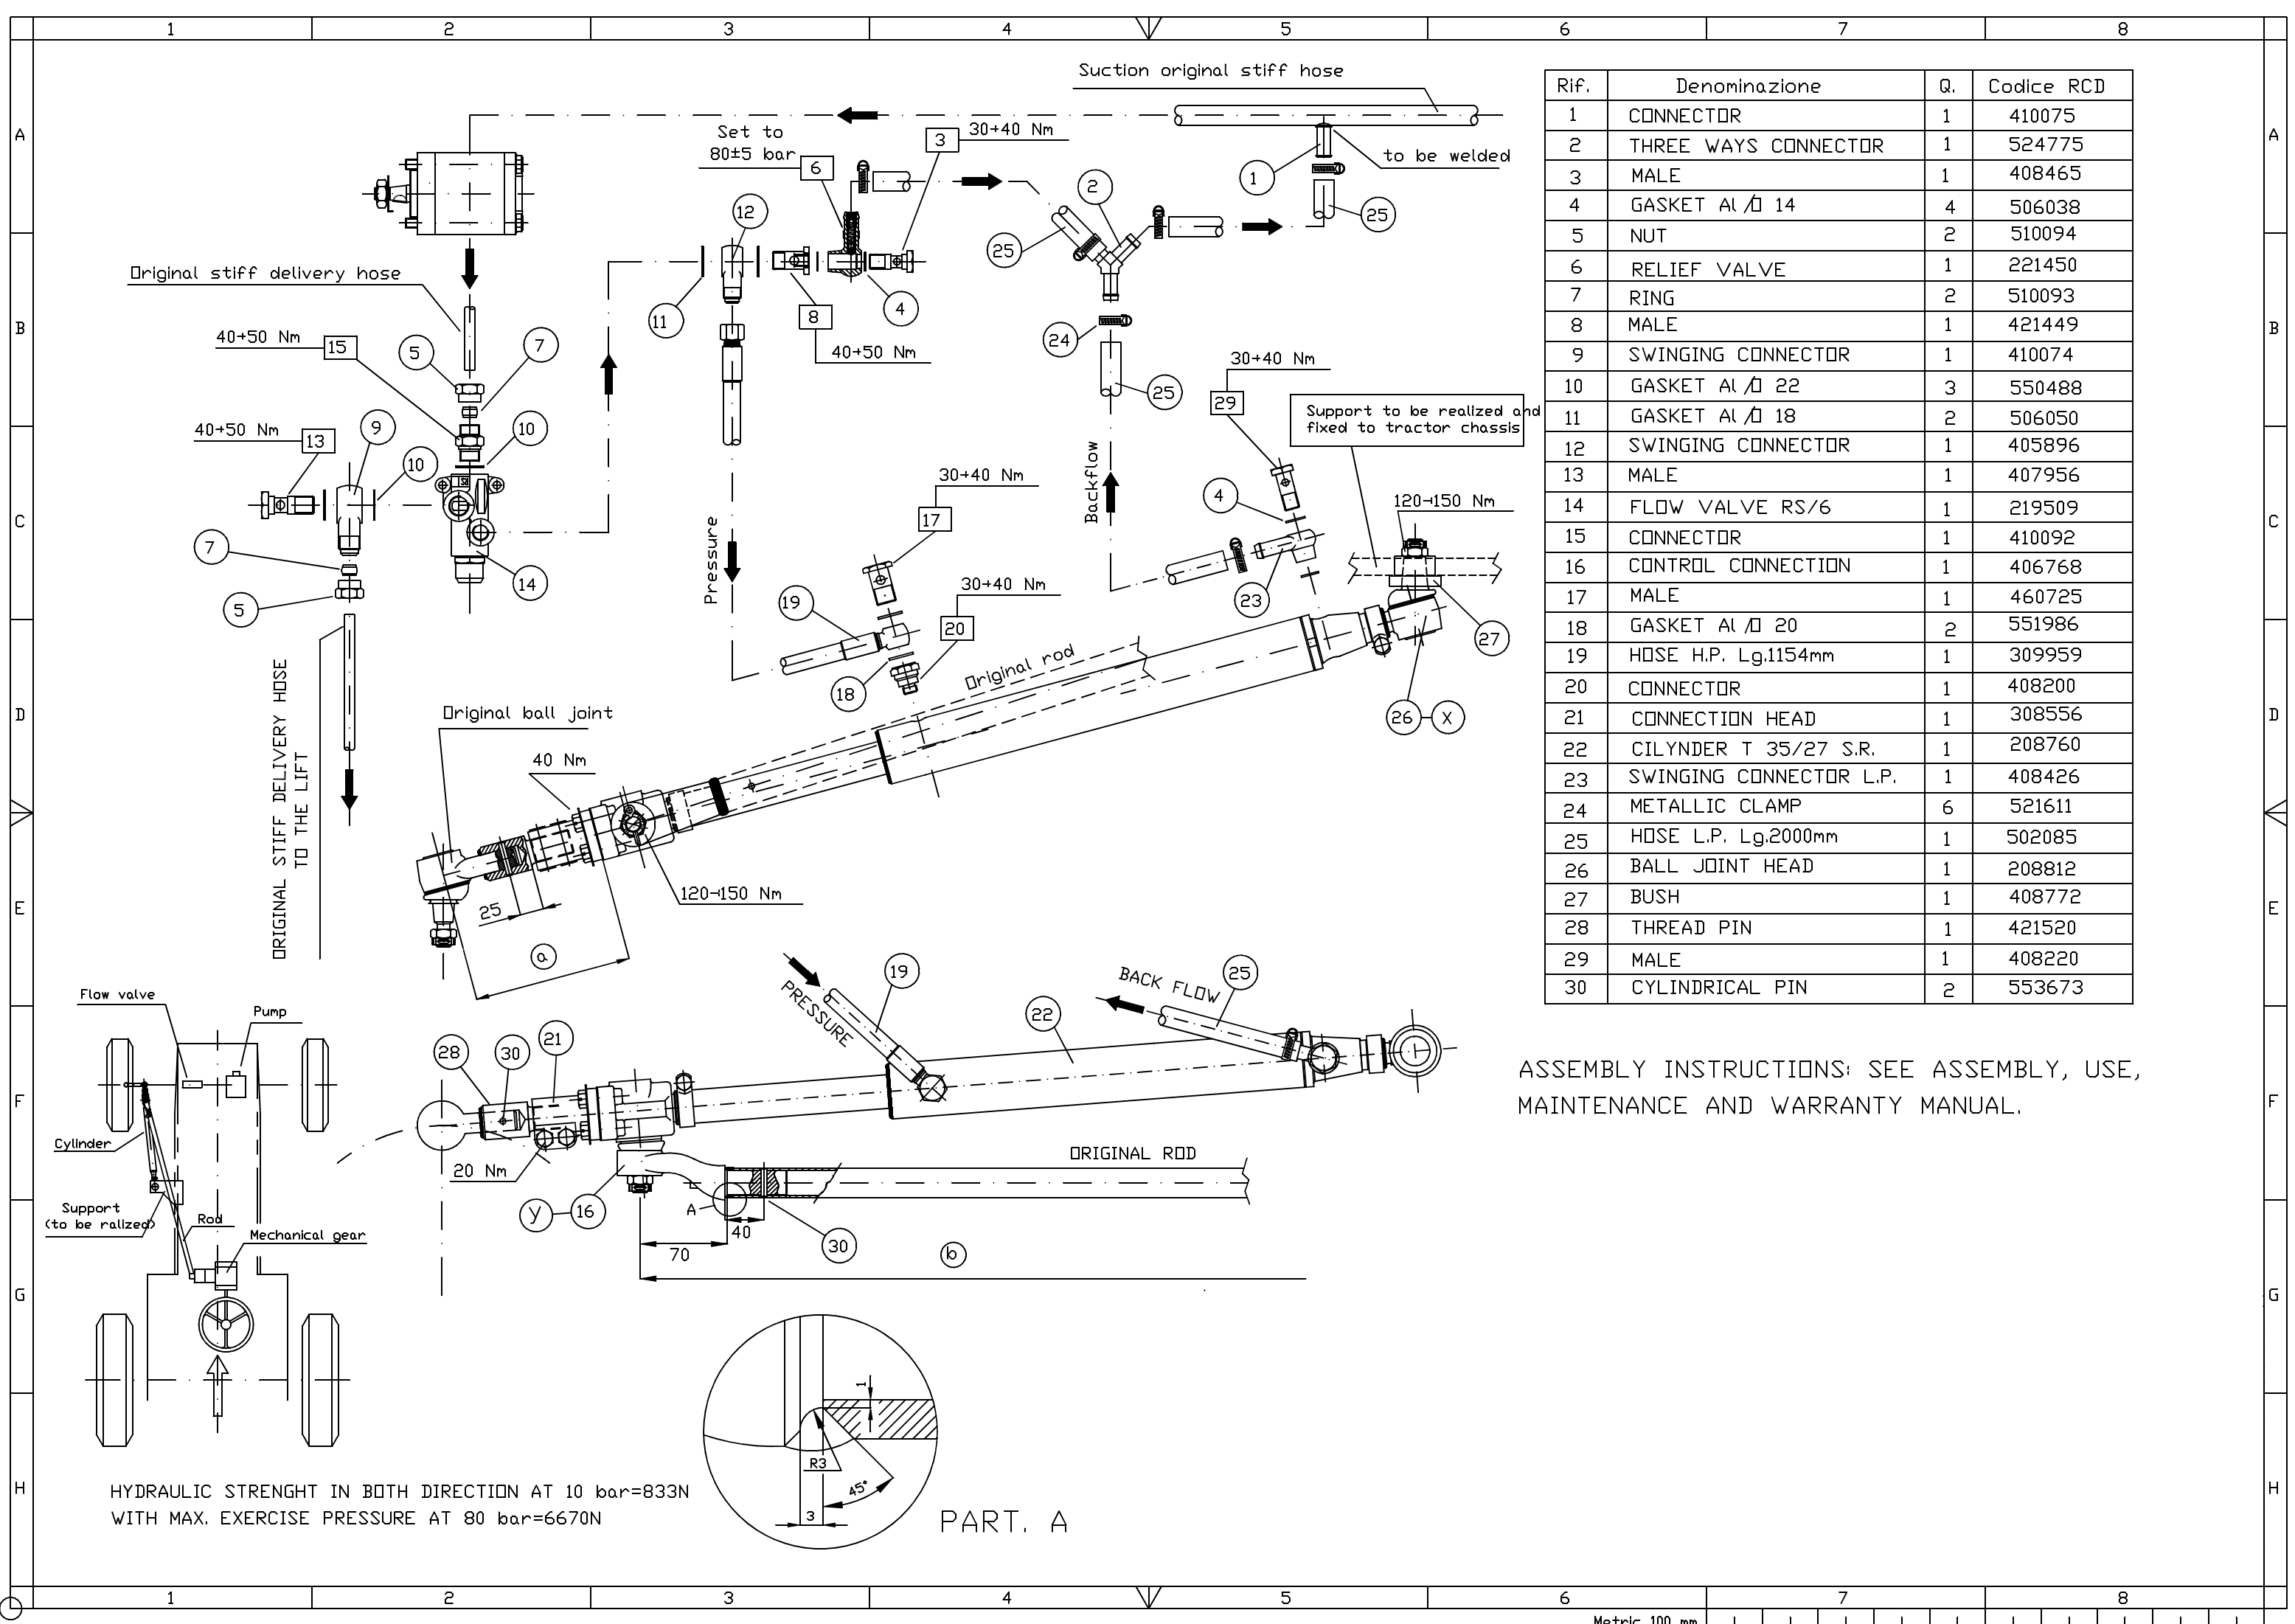

Rif.	Denominazione	Q.	Codice RCD
1	CONNECTOR	1	410075
2	THREE WAYS CONNECTOR	1	524775
3	MALE	1	408465
4	GASKET AL Ø 14	4	506038
5	NUT	2	510094
6	RELIEF VALVE	1	221450
7	RING	2	510093
8	MALE	1	421449
9	SWINGING CONNECTOR	1	410074
10	GASKET AL Ø 22	3	550488
11	GASKET AL Ø 18	2	506050
12	SWINGING CONNECTOR	1	405896
13	MALE	1	407956
14	FLOW VALVE RS/6	1	219509
15	CONNECTOR	1	410092
16	CONTROL CONNECTION	1	406768
17	MALE	1	460725
18	GASKET AL Ø 20	2	551986
19	HOSE H.P. Lg.1154mm	1	309959
20	CONNECTOR	1	408200
21	CONNECTION HEAD	1	308556
22	CILYNDER T 35/27 S.R.	1	208760
23	SWINGING CONNECTOR L.P.	1	408426
24	METALLIC CLAMP	6	521611
25	HOSE L.P. Lg.2000mm	1	502085
26	BALL JOINT HEAD	1	208812
27	BUSH	1	408772
28	THREAD PIN	1	421520
29	MALE	1	408220
30	CYLINDRICAL PIN	2	553673

ASSEMBLY INSTRUCTIONS: SEE ASSEMBLY, USE, MAINTENANCE AND WARRANTY MANUAL.

HYDRAULIC STRENGHT IN BOTH DIRECTION AT 10 bar=833N
WITH MAX. EXERCISE PRESSURE AT 80 bar=6670N

PART. A